


LED LINEAR LIGHT

EDGE Series

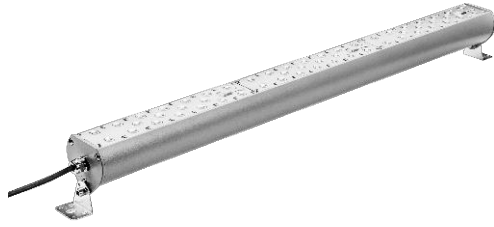

The EDGE series redefines how you think about LED linear lighting. It provides unmatched illumination performance and significant energy savings coupled with modern design elements.

FEATURES & BENEFITS

- Rugged extruded aluminum housing.
- Modular design allows for easy installation, replacement and maintenance.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Over 20 optical lenses are available for virtually any application.
- Surface mount and suspension mount available.
- Multiple units are linkable.
- Multiple lighting control options are available, e.g. motion sensor, DALI, 1-10V.
- 10 years limited warranty available.


CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ CB/ CE/ RoHS/ IK08

TECHNICAL PARAMETERS

Power	60-150W
Input	120-277VAC or 220-240VAC or 347-480 VAC
PF	>0.95
THD	<20%
L85	>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-140lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP67
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	Optional
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Black / Grey

* Standard

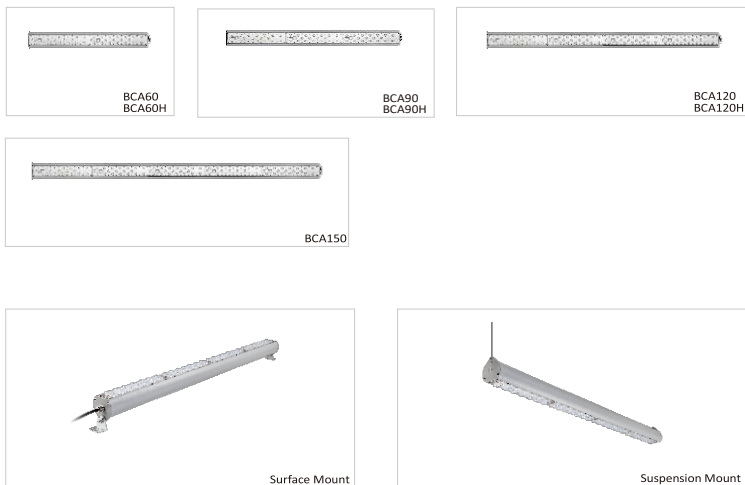

ORDERING INFORMATION

Example : BCA60-T1M-30K-BK-00

MODEL (Nominal Power)		OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC	347-480VAC					
BCA60	BCA60H*	T1M	30K	BK	00	Emergency Power Supply (EPS)
BCA90	BCA90H*	T2M	40K	★ GR	Not required	
BCA120	BCA120H*	T3M	★ 50K		02	
BCA150		T3L	★ 57K		Motion Sensor	
		T4S			04	
		T4M			DALI	
		T5U			05	
		T5V			1-10V dimming	
		T5W				
		T5S				
		T5M				
		T5L				
		T5X				

★ Regularly stocked item

* 1-10V dimming & DALI & Motion sensor unavailable