


# LED WALL PACK

## GAMA-W Series



Providing unmatched illumination performance and energy efficiency, the GAMA-W series is a compact yet easy-to-install product with a robust operational life.

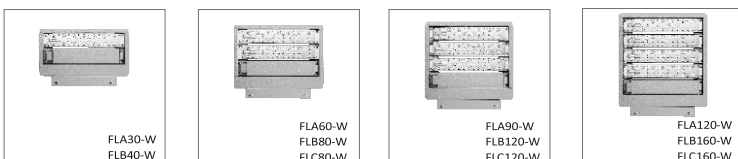

## FEATURES & BENEFITS

- Modular design allows for easy installation, replacement and maintenance. This design also creates a chimney effect which provides exceptional thermal management.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Over 20 optical lenses are available for virtually any application.
- Interchangeable with the other GAMA Series with a bracket change.
- High quality LEDs, driver and components, e.g. MOLEX, WAGO connectors.
- Multiple lighting control options are available, e.g. DALI, 1-10V.
- 10 years limited warranty available.

## CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ SAA/ ENEC/ CB/ CE/ ErP/ RoHS/ IK08

## TECHNICAL PARAMETERS

Power	30- 160W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L85	>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-140lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP65
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	/
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Grey/Black/Bronze/White

\* Standard

## ORDERING INFORMATION

Example : FLA30-W-T3L-50K-GR-00

MODEL (Nominal Power)			MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (30W/module)	120-277VAC or 220-240VAC (40W/module)	347-480VAC (40W/module)						
FLA30 FLA60 FLA90 FLA120	FLB40 FLB80 FLB120 FLB160	FLC80* FLC120* FLC160*	W	T1M T2M T3M T3L T4S T4M T5U T5V T5W T5S T5M T5L T5X	30K ★ 40K ★ 50K 57K	★ BK GR BZ WH	00 Not required 01 Photocell 02 Motion Sensor 03 Photocell + Motion Sensor 04 DALI 05 1-10V dimming	Bird Spike 20KA Surge Protection Device Back Light Shield Safety Cable

\* DALI unavailable

★ Regularly stocked item