


LED AREA LIGHT

AURORA-L Series



AURORA-L series area light is perfect for outdoor area lighting, providing significant energy and maintenance savings while improving illumination performance.

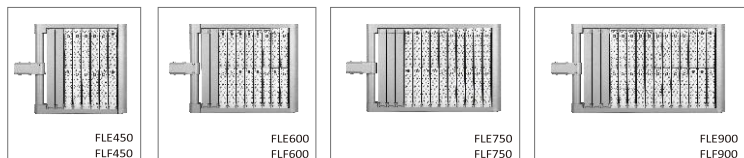

FEATURES & BENEFITS

- High lumen output and high mounting height solution.
- Slim & low profile design that minimizes wind load.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Over 15 optical lenses are available for virtually any application.
- Adjustable arm that mounts to a horizontal or vertical 2 3/8" (60mm) O.D. tenon.
- Tenon length must be a minimum of 4.72" (120mm).
- -60~+30 degree or -90~+0 degree of adjustment for leveling when horizontally mounted.
- 10 years limited warranty available.

CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ SAA/ CB/ CE/ RoHS / IK08

TECHNICAL PARAMETERS

Power	450- 900W
Input	120-277VAC or 220-240VAC or 347-480 VAC
PF	>0.95
THD	<20%
L85	>200,000H/>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-160lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 90
IP Rating	IP67
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	Optional
Smart Control	Optional
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Grey/Black/Bronze/White

* Standard

ORDERING INFORMATION

Example : FLE900-L-T5S-50K-GR-00

MODEL (Nominal Power)		MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (75W/module)	347-480VAC (75W/module)						
FLE450 FLE600 FLE750 FLE900	FLF450* FLF600* FLF750* FLF900*	L	T1M T2M T3M T3L T4S T4M T5U T5V T5W T5S T5M T5L T5X T5D	30K ★ 40K ★ 50K 57K	★ BK GR BZ WH	00 Not required 01 Photocell 02 Motion Sensor 03 Photocell + Motion Sensor 04 DALI 05 1-10V dimming	Bird Spike 10KA/20KA Surge Protection Device Back Light Shield Safety Cable

* 1-10V dimming unavailable

★ Regularly stocked item