

SOLAR BOLLARD 2SPBL13/2SPBL14




Installation instructions

PRIOR TO INSTALL


Ensure install location receives at least 2 to 3 hours of midday sun on average. Please handle bollard with care as scratches will affect appearance and powder coat durability.

2SPBL13/14 MODEL

Please refer to the diagram below to identify the model you are installing.

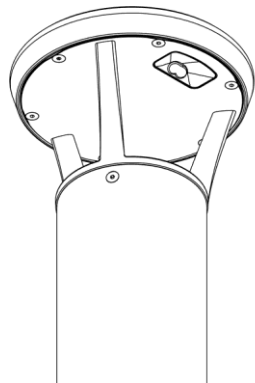


2SPBL13/14-T3

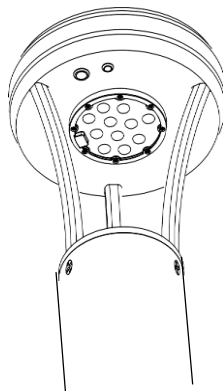

2SPBL13/14-T5


TOOLS REQUIRED

- 5/32 inch hex key
- 3/4 inch wrench or deep socket

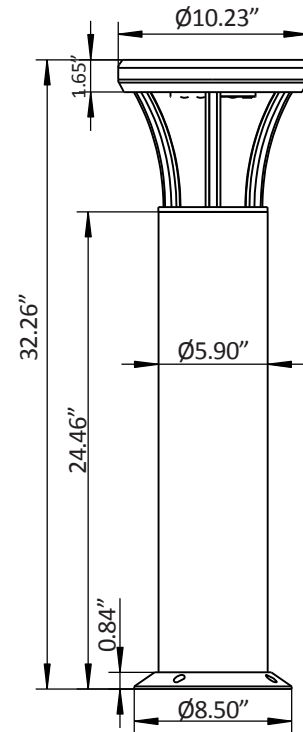


INSTALLATION

With a one to two foot setback from the path or area to be illuminated, install concrete footing with supplied anchor bolts. Align anchor bolts to path as shown below using the supplied cardboard template to hold the bolts in position.

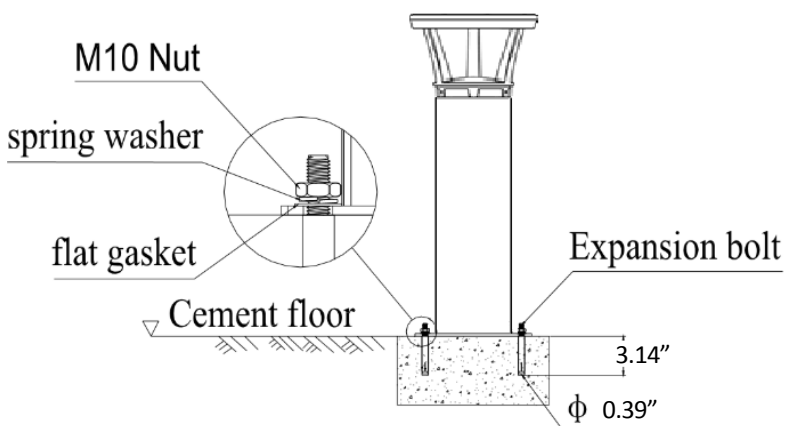

Option 1

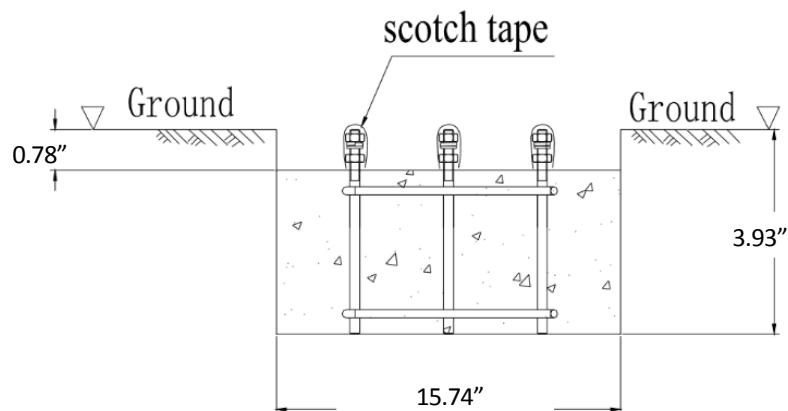


Option 2

SOLAR BOLLARD 2SPBL13/ 2SPBL14

Installation instructions




BASEPLATE DIMENSIONS

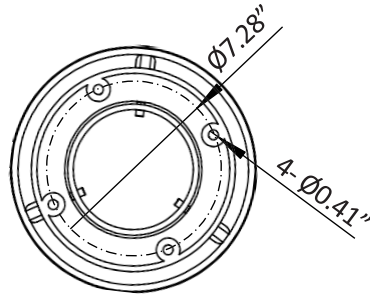

CONNECT BATTERY


Remove the head of the bollard from the post and connect the battery cables. Observe the light to ensure it illuminates for approximately 20 seconds after connecting the battery. If the light does not illuminate after connecting the battery, please call us .

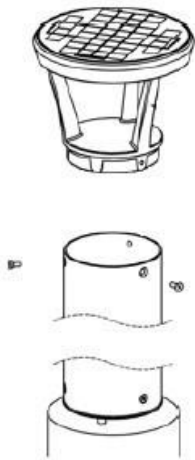

Battery integrated in the fixture

For 2SPBL13/14-T3 model only

Ensure the LED optic is facing the pathway.

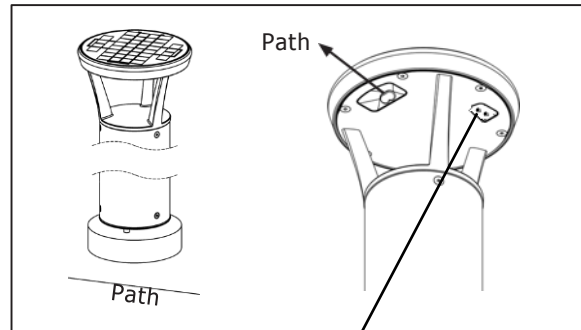

Switch ON/OFF
LED Color button

PUT BACK HEAD

Place the head back on the post and fasten with the supplied 1/4 - 20 screws and tighten to 65 in-lbs.

SOLAR BOLLARD 2SPBL13/2SPBL14



Installation instructions

How to operate this bollard light ?

Steps:

- Press the button for 2-3 seconds, Flash two times, bollard goes to mode 1
- Press button (no need press it for 3 seconds), Flash three times, it goes to mode 2
- Press button, Flash four times, it goes to mode 3
- Press button, Flash five times, it goes to mode 4

All modes completed, if you press button again, it goes to mode 1 again, and again cycle.....

If you need to turn off the light, just Press the button for 2-3 seconds.

Four operation modes

Mode 1: 6 hours 100% brightness, then 25% to dawn.

Mode 2: 4 hours 100% brightness, then 25% to dawn.

Mode 3: 1st hour 100%, 2nd-4th hrs 50% , then 25% to dawn.

Mode 4: 100% brightness Dusk to dawn.

Then, fix bollard head and base by screw (Option)



Install the bollard to the ground by explosion screw

