

LIGHTMARK T1/T2

Installation Manual



Why us?

Innovative Technology

High-efficiency solar and advanced LEDs deliver superior performance, long life, and maximum ROI.

Photometric

We conduct photometric measurements on all our products to ensure optimal performance and compliance with industry standards

Versatile Lightning

We designs and install solar-powered lightning systems tailored for all kind of locations such as streets, parks, pathways, homes, etc.

Global Reach

Worldwide success proves our adaptability and regulatory expertise.

Sustainable Savings

These solutions enhance safety, promote sustainability and providing significant energy and cost saving.

Warranty


SolarPath is dedicated to delivering architectural and commercial-grade solar lighting that can be customized to meet specific client requests, both in technical specifications and aesthetic design, ensuring a perfect fit for a diverse range of needs.

1 Overview


This document describes the procedure for the installation of the LightMark T1 and LightMark T2 solar powered pavement markers.

LightMark T1

Top view

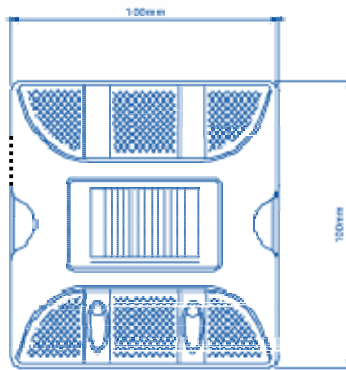


Side view




LightMark T2

Top view



Side view



2 Installation Environment

1. Lighting conditions

All LightMark series pavement markers should be installed in an environment which allows at least 3 hours of charge time by direct clear day sun-light or 8 hours of direct soft sun-light (cloudy or rainy conditions)

2. Temperature

LightMark T1 and LightMark T2 are resistant to extreme weather conditions and can operate under the temperature range of -40°F to 176°F.

Constant operation outside this temperature range may affect unit lifetime and output.

3. Chemicals

While well resistant to water and salt, long exposure of the unit to certain chemicals such as acids, solvents and toxic gases can harm the unit' body and top cover, therefore, installation of the unit in such environment is not recommended.

3 Required tools and materials

Tools

- ☐ Concrete coring drill
- ☐ Jack Hammer
- ☐ 5" (5m) wide Jack Hammer chisel bit
- ☐ Air compressor/pressure washer (for cleaning)
- ☐ LightMark T1/T2 installation
 - $\Phi 1\frac{3}{16}$ " (3cm) Concrete/Asphalt drill bit

Material

- ☐ Adhesive – Recommended: Polymeric epoxy glue (Polycraft #432)

Optional


- ☐ Power Generator
- ☐ Extension cords
- ☐ Lighting equipment
- ☐ Disposable rubber gloves (for handling adhesive)
- ☐ Cleaning tools (brooms and brushes)

4 Installation Procedure


LightMark T1 & LightMark T2

1. For optimal installation results, verify that the designated installation surface is flat.
2. Drill an installation hole to the following dimensions:


	Inches	(Cm)
Diameter	1"3/16"	(3)
Depth	2"5/8"	(7)

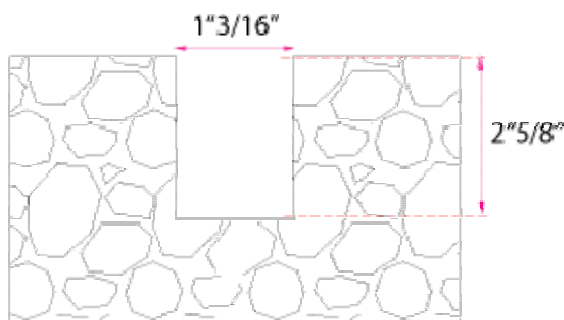

3. Make sure the installation drill hole and its surrounding are clean of any dust and debris (use of high pressure air compressor)
4. WITHOUT USING ADHESIVE, place a LightMark T1/T2 anchor in the installation drill hole
5. Make sure the unit can be inserted into the drill hole without the use of force and that there is a small gap between the unit body and the installation hole walls.
6. Remove unit from installation drill hole.
7. Making sure area is completely dry, pour / inject adhesive into the drill hole.

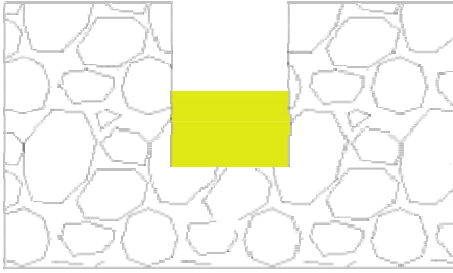

8. Apply adhesive on the underside of the LightMark T1/T2's lip (the area meant to be in contact with the ground)
9. Place the LightMark T1/T2 anchor into the installation drill hole. Make sure that the unit's lighting panel is facing oncoming traffic direction.
10. Firmly press the unit into drill hole onto the adhesive until the main unit component (covered with adhesive) touches the road surface.

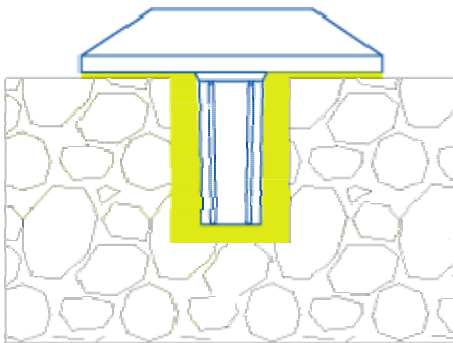

11. Remove any excess adhesive from the installation area.
NOTE: If any cleaning and removal of the Polymeric epoxy glue is required, it is recommended to do so during the first hour of the glue's exposure to air and can be done using soap and water.

5 Installation verification

3 hours past installation, verify that the unit is firmly locked in its installation drill- hole and is irremovable.



Contact us



+1.201.490.4499

Toll free: 1.888.333.SOLAR (7652)



contact@solarpathusa.com



www.solarpathusa.com